
#### 640mm diameter 2.5 mm LED bead pitch

Seamlessly assembled from 4 right-angled fan-shaped LED module panels

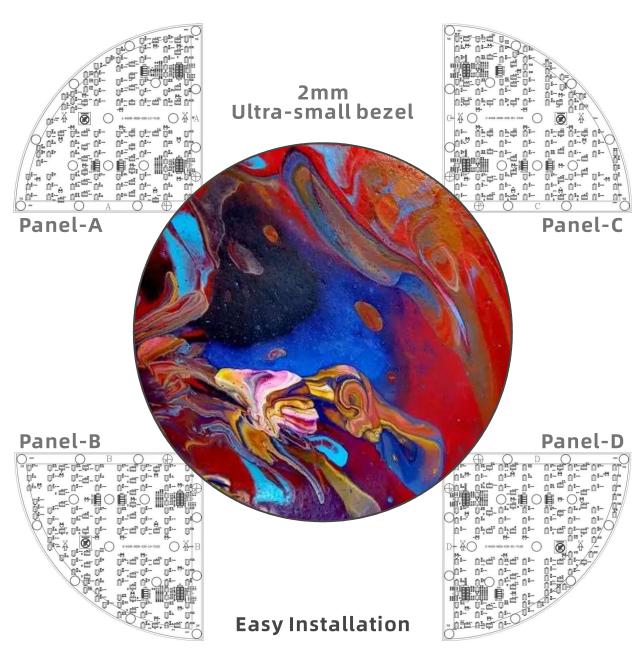


hanging, wall-mounted, base-standing, bracket standing, and creative splicing installation, as well as horizontal placement installation.

# 02 Specification:

#### **Art Flat Circular** Shape Design **LED** screen


	Parameter	Value
	LED Type	SMD(1921/2020)
Phyiscal Parameter	Pixel pitch (mm)	2.5mm
	Panel Dimensions (WxHxD)	645mm*645mm*60mm (One-side) 645mm*645mm*80mm (Two-sided)
	Pixel Per Panel	256×256
Ph	Panel Weight (kg)	Indoor 9KG-10KG (One/Two-sided) Outdoor 12KG-15KG (One/Two-sided)
	Panel Material	Iron
	Module Dimensions (WxH)	320mm×320mm (Flabellate)
	Brightness (nit)	Indoor 1000 nit Outdoor  4000 nit
	Refresh Rate (Hz)	3840Hz
. <u></u>	Gray scale (bit)	12Bit/16Bit
tron	Contrast Ratio	4000:1
otoelectror Parameter	Color Temperature (K)	6500
Optoelectronic Parameter	Viewing Angle (H/V) (°)	140°/140°
0	Driving Type	1/32 dynamic scan
	AC Operating Voltage (V)	AC 100V~240V
	Power Consumption	200W (One-side)
	(Max./Avg.)	400W (Two-sided) -40~+60
	Storage Temperature (°C)	
	Operating Temperature (°C)	-10~+40
	Storage Humidity (RH)	10%~90%
tion	Operating Humidity (RH)	10%~90% Indoor IP40/IP21
Application Parameter	IP Rating (Front/Rear)	Outdoor IP65
AP 9	LED Lifetime (H)	100000
	Module Maintenance	Front
	PSU & Others Maintenance	Rear
	Panel Installation Type	Floor/Hanging/Fixed Installation

### 02 Combination:

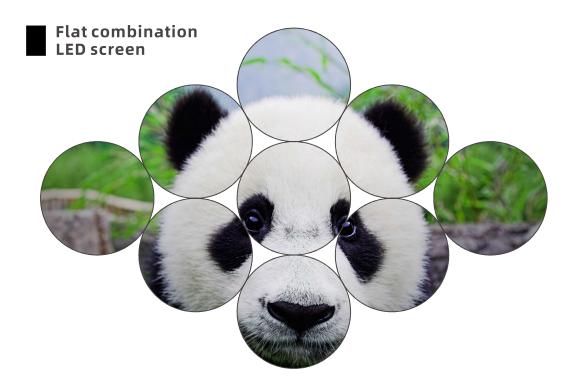

#### Multiple online displays

More innovative combinations await your ideas

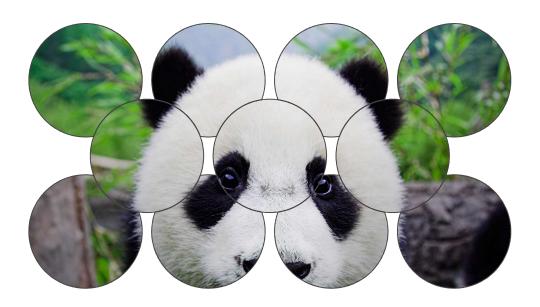

Overlay combination LED screen

#### 640mm diameter 2.5 mm LED bead pitch


It is seamlessly assembled by 3 right angle sector LED module panels + 1 square LED module



**Easy Installation** 

hanging, wall-mounted, base-standing, bracket standing, and creative splicing installation, as well as horizontal placement installation.

## 02 Combination:

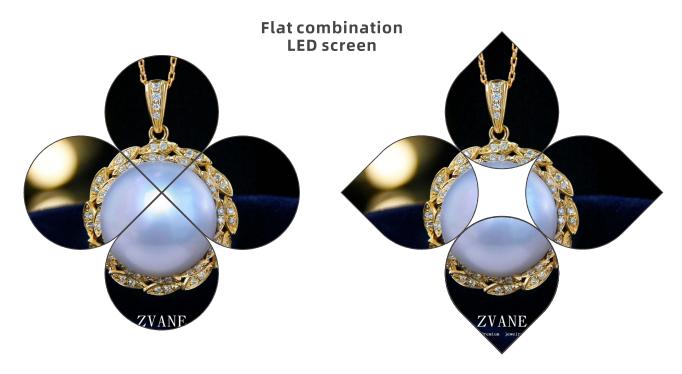

#### Multiple online displays

More innovative combinations await your ideas



#### 640mm diameter 2.5 mm LED bead pitch

It is seamlessly assembled by 3 right angle sector LED module panels + 1 square LED module



**Easy Installation** 

hanging, wall-mounted, base-standing, bracket standing, and creative splicing installation, as well as horizontal placement installation.










#### Multiple online displays

More innovative combinations await your ideas

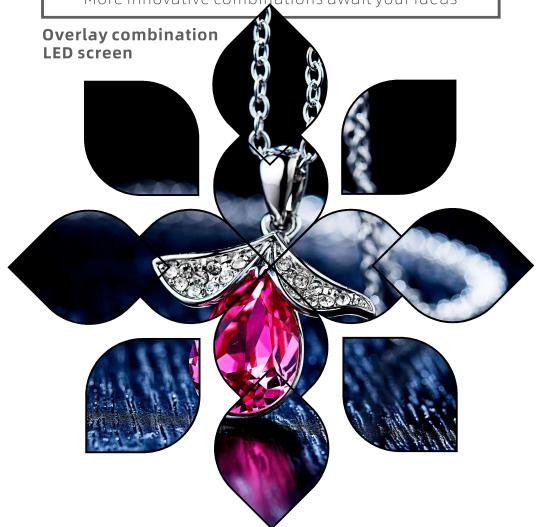

#### Standardized **Creative combination LED display**












### Standardized **Creative combination LED display**












### 02 Specification:

#### Flat Circular Shape Design LED screen

As a new type of shop signboard. The LED logo sign can satisfy the most logo display requirements. It's made for displaying retail advertising. Restaurants, coffee shops, and chain stores are where the LED logo sign usually applies to. Except for displaying the logo and commercial advertising. This unique LED round display screen can be used as an artistic decoration. clock, and date display.

Fashion design with creative round shape makes the brand LED logo sign more attractive in appearance.



#### PROTECTION FROM INJURY

The Circle LED Display screen uses an asynchronous control card. Round LED Display supports all kinds of video and picture formats. such as mp4, jpg, png, gif, etc.

The screen is basically a plug and play device by using USB. Circle LED Display Screen also has a 4G optional controller. sending programs remotely will be a piece of cake.

#### **Multiple Control Method**

LED signage not only enables many tasks such as advertising distribution, updating and deleting content. Media files are easily done via PC, laptop, mobile phone device using Wi-Fi or updated via a USB stick device. In addition, the circular LED display comes with 8GB of video storage capacity. LED signage is a great alternative to traditional acrylic LED signage and light boxes.

